
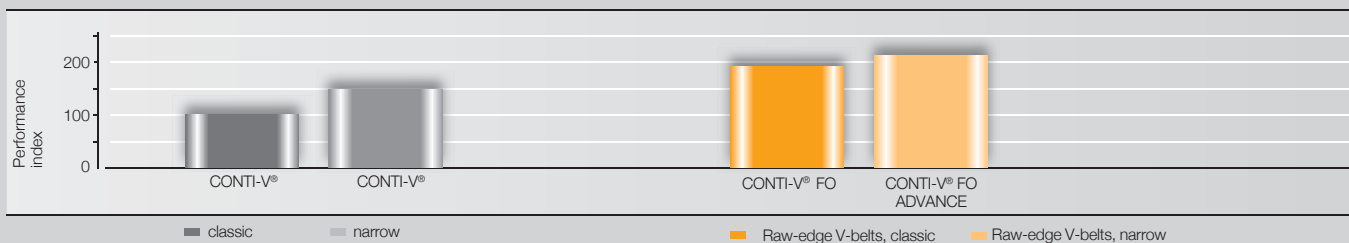


CONTI-V® FO ADVANCE

Transversely stiff raw-edge heavy-duty V-belts for powerful, sustained power transmission with enhanced running smoothness according to DIN 7753

Properties:

- ▶ conditionally resistant to oil
- ▶ temperature range from -30°C to +90°C
- ▶ electrically conductive to ISO 1813, conductivity beyond 3500 mm electrically conductive after testing
- ▶ dust-proof
- ▶ suitable for tropical climates
- ▶ increased power ratings
- ▶ reduced noise level

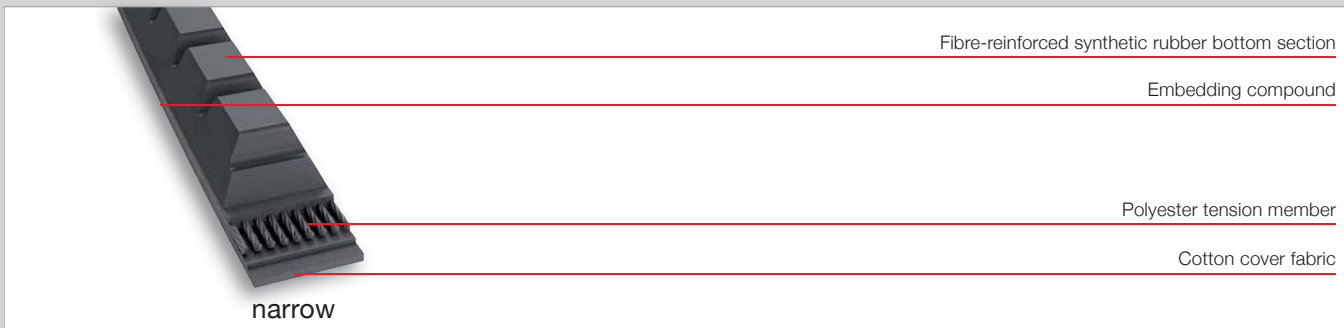

| Profile | Length range L _d (mm) |
|-----------|----------------------------------|
| XPZ / 3VX | 562 - 3550 |
| XPA | 590 - 4000 |
| XPB / 5VX | 950 - 6700 |
| XPC | 2000 - 7100 |



Power Transmission Group

Market segment
Industry

Contact
ContiTech Antriebssysteme GmbH
D-30169 Hannover
Phone +49 511 938 - 71
industrie.as@ptg.contitech.de

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2012 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/disc_en