


CONTI® SYNCHROFORCE EXTREME

Heavy-duty timing belts for high acceleration forces and high impact loads

Properties:

- ▶ largely oil-resistant
- ▶ temperature range, depending on application, from -30°C to +130°C
- ▶ resistant to aging and ozone
- ▶ suitable for tropical climates
- ▶ maintenance-free
- ▶ suitable by counterbending
- ▶ suitable by high impact loads
- ▶ increased power ratings

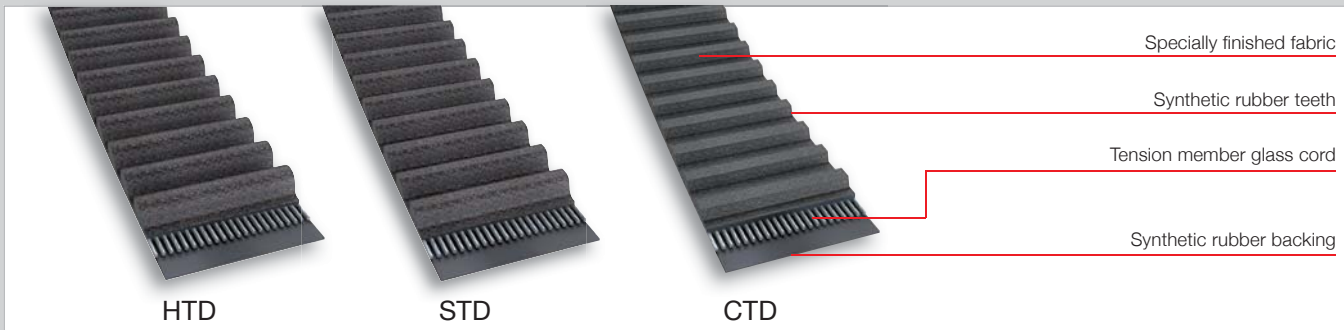

HTD

| Profile | Length range L_p (mm) |
|-----------------|-------------------------|
| HTD 8M EXTREME | 480 - 3808 |
| HTD 14M EXTREME | 966 - 4578 |

STD

| Profile | Length range L_p (mm) |
|-----------------|-------------------------|
| STD S8M EXTREME | 720 - 1064 |

CTD

| Profile | Length range L_p (mm) |
|------------------|-------------------------|
| CTD C8M EXTREME | 640 - 1600 |
| CTD C14M EXTREME | 1568 - 3920 |



Power Transmission Group

Market segment
Industry

Contact
ContiTech Antriebssysteme GmbH
D-30169 Hannover

Phone +49 511 938 - 71
industrie.as@ptg.contitech.de

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2012 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/disc_en