


CONTI® SYNCHROFORCE CXA

Heavy-duty timing belts for sustained transmission of higher torque levels at low speed

Properties:

- ▶ conditionally resistant to oil
- ▶ temperature range, depending on application, from -20°C to +100°C
- ▶ electrically conductive to ISO 9563
- ▶ suitable for tropical climates
- ▶ resistant to aging and ozone
- ▶ maintenance-free
- ▶ suitable by counterbending
- ▶ suitable by highest loads
- ▶ increased power ratings

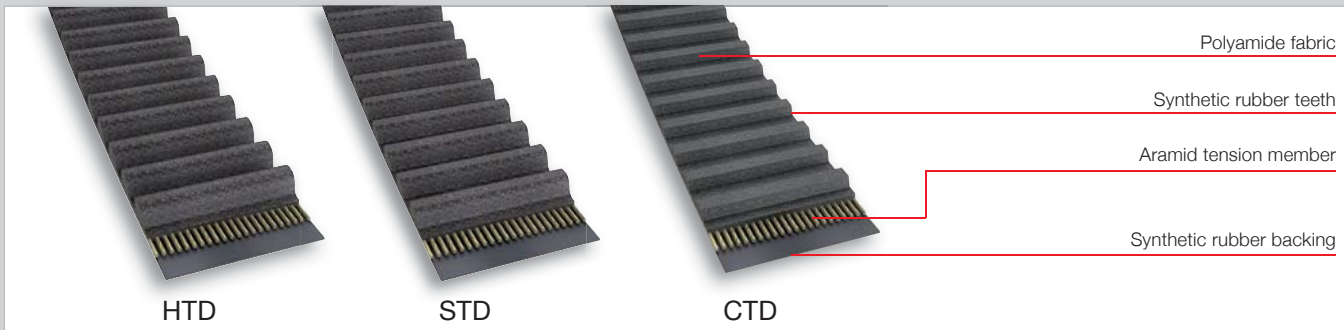

HTD


Profile	Length range L _p (mm)
HTD 8M CXA	288 - 3808
HTD 14M CXA	966 - 4578

STD

Profile	Length range L _p (mm)
STD S8M CXA	440 - 2848

CTD

Profile	Length range L _p (mm)
CTD C8M CXA	288 - 1600

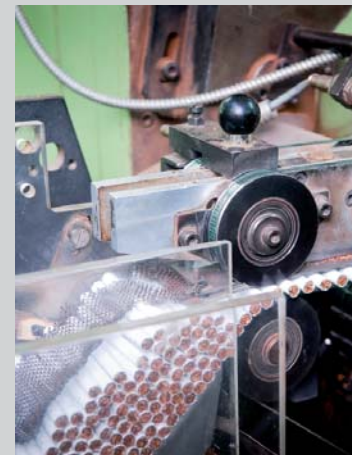

Power Transmission Group

Market segment
Industry

Contact
ContiTech Antriebssysteme GmbH
D-30169 Hannover
Phone +49 511 938 - 71
industrie.as@ptg.contitech.de

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2012 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/disc_en